

## Loop powered indicator **LoopView**

### Technical description

#### Characteristic

- Electrical Connection: EN 175301-803 A standard (DIN 43650 form A)
- display: 4-digit red LED display
- configuration: External push buttons
- password protected configuration access
- protection rate: IP65, NEMA4X

#### Input

- (4 ÷ 20) mA - 16 bit display measurement

#### Display resolution

- indicating range: -1999 to 9999 or 9999 to -1999

#### Accuracy

- 0,5% range
- thermal deviation ± 0.03% per ° C

#### Power source

- 4 - 20 mA loop powered, max current load: 60 mA
- voltage drop: below than 10 mA: < 5.4 V 10 up to 12 mA: < 3.9 V higher than 12 mA: < 2.8 V

#### Operating conditions


- temperature: (-40 ÷ 85) °C

#### Dimensions [mm]

65x45x45 mm



Wiring diagram

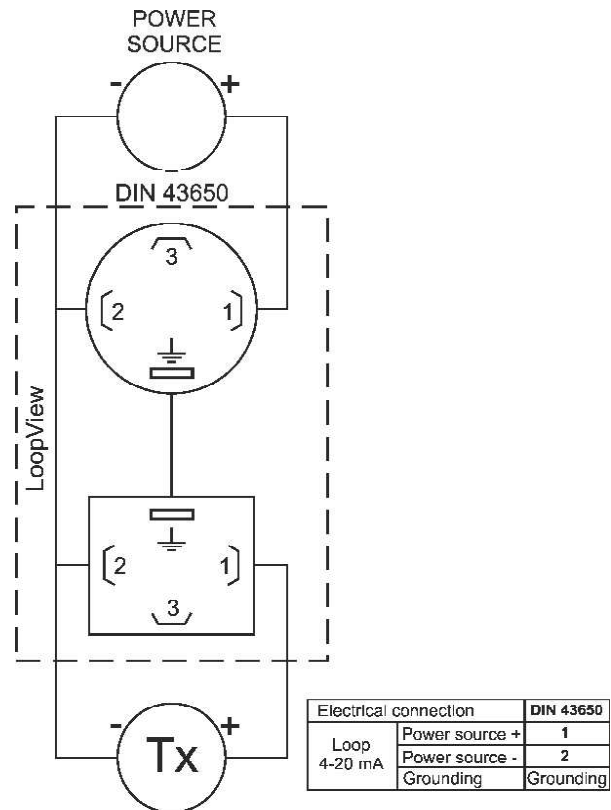

### Ordering example

Loop powered indicator LoopView